

## 1006-66RC

Coupling 6" Concrete x 6" Cast Iron, Plastic, Steel, Copper and Lead Shielded

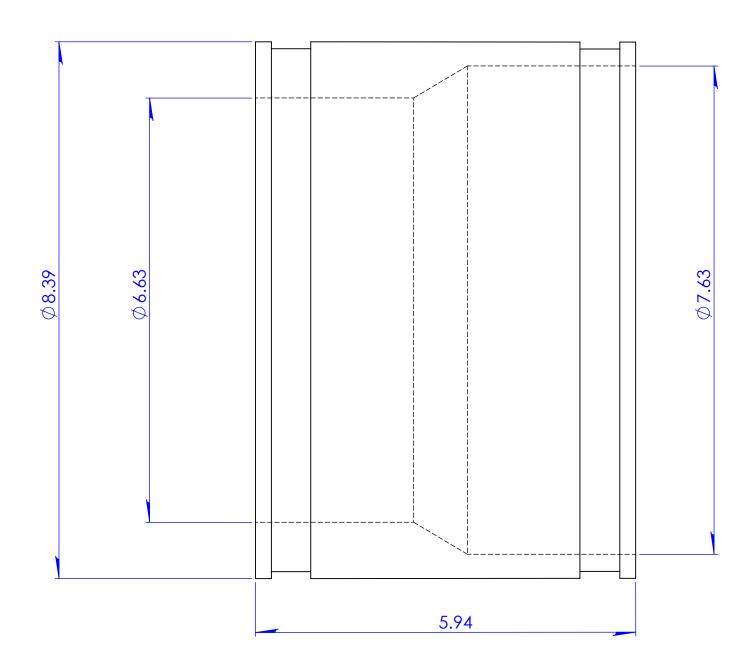

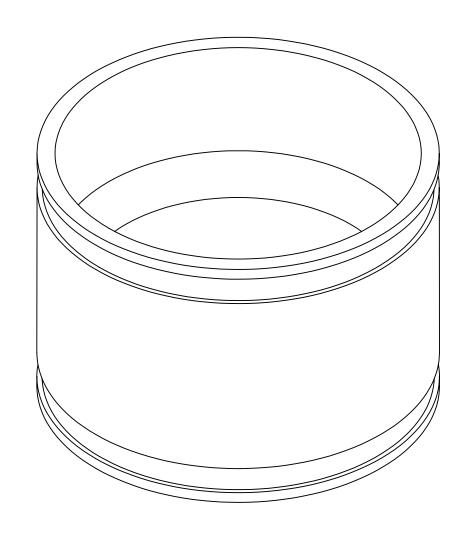

D. Brady

DATE:

9/12/2011

SCALE:

not to scale

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF						
FERNCO, INC. ANY REPRODUCTION IN						
PART OR AS A WHOLE WITHOUT THE						
WRITTEN DEDMISSION OF FERNICO INC						

TOLERANCES:
.X= Fractional±
.XX= ±.06
ANG.= ±3°
UNLESS OTHERWISE SPECIFIED

	Part Weight	4.96 lbs.	Installation Torque	60" Lbs.	UNITS:	SIZE:	DESIGNER:
	Min/Max Temp.	-30/140 Degrees F	Conforms to ASTM	D5926, C1173	INCHES	A	
	Pressure Tested	4.3 PSI	Clamps used	300 Series Stainless	3RD ANGLE P	OUEOKED.	
	Material	Flexible PVC 60 Duro Shore A	Box Quantity		DO NOT SCALE DRAWING		CHECKER: